



SCALETRAX™ I.T.A.D. OPERATING INSTRUCTIONS:

1. Flip open the cover on the back of the ITAD and connect AC power and ground outputs from an auxiliary power source (not from the track) to the "AUX" power inputs.


Consult your accessory's operating instructions and wire the accessory to the ITAD's NO (Normally Open), NC (Normally Closed, or COM (Common) terminals as directed.

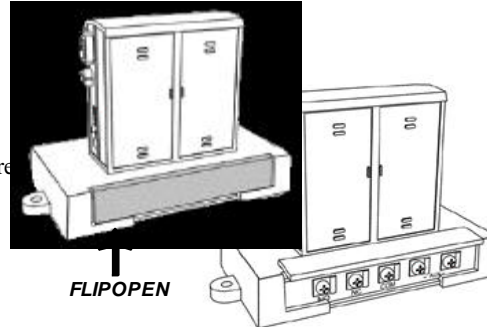

2. Attach the ITAD to your layout in the desired location, with the small red windows facing the track.

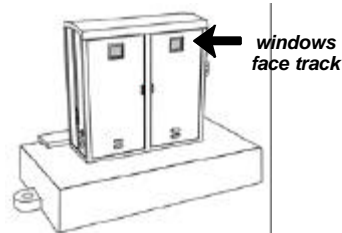

3. Insert a small flat or Philips screwdriver into the hole on either side of the ITAD and turn as indicated on the ITAD to adjust the range/sensitivity and delay/activation timing of your ITAD to fit your layout and operational needs.

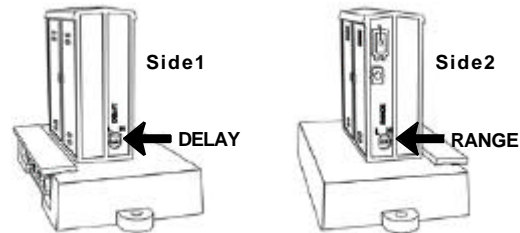

CONNECTING THE I.T.A.D. TO SCALETRAX:

Example: To use an ITAD with the operating passenger platform:

1. Place the ITAD past the platform (about where your engine will be when you stop at the station), so that it will not be triggered until the passenger coaches (not the engine or baggage car) are aligned with the platform.
2. If you have two or more parallel tracks there, set the ITAD to sensitive, so only the train that runs on the track beside the station will activate the ITAD.
3. If you have two or more parallel tracks there, set the ITAD to sensitive, so only the train that runs on the track beside the station will activate the ITAD.
4. Set the ITAD to a several second delay, so the passenger figures on the platform will not drop back into sight until after the train has left the station and given your visitors a chance to see that the figures have "boarded the train."

